



DM Dura|Mate™ Family



Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic or Metal Circular Connectors

Amphenol Sine Systems' **Dura|Mate™ Family** of environmentally-sealed, multi-pin, heavy duty, plastic (AHDP) or metal (AHDM/AHDBM) circular connectors provide an economical, quick-connect, bayonet-locking system manufactured to withstand the challenges and complexities of harsh-environment, off-road applications. Our ISOBUS products specifically meet ISO 11783 standards (for control and communications between tractors, implements and software) for agricultural applications.

Currently available in the following Series:

DM Dura|Mate™ AHDP **DM Dura|Mate™ AHDM**

DM Dura|Mate™ AHDP ISOBUS 91 Series **DM Dura|Mate™ AHDM/AHDBM ISOBUS 91 Series**

Dura|Mate™ AHDP (Pgs 3-7): Shell Size 18 with 8 insert arrangements 2, 6, 8, 14(x3), 20 and 21

Shell Size 24 with 14 insert arrangements 7(x2), 9, 14, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

Dura|Mate™ AHDM (Pgs 8-11): Shell Size 18 with 6 insert arrangements 2, 6, 8, 14, 20 and 21

Shell Size 24 with 14 insert arrangements 7(x2), 9, 14, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

Dura|Mate™ AHDP ISOBUS 91 (Pgs 12-16): Shell Size 24, 9 Position

Dura|Mate™ AHDM/AHDBM ISOBUS 91 (Pgs 17-22): Shell Size 24, 9 Position


Key Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High current configurations incorporating revolutionary RADSOK® contacts
- High strength impact resistant & lightweight thermoplastic or zinc-alloy metal housings
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP68/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in three separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provide an enhanced threading for use with our wide variety of screw-on or clamshell backshells (AHDP Only)
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint (AHDP Only)
- Backshell Ring Adapters (BRA) allow for use with other compatible industry-standard snap-on backshells (AHDP Only)
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDM/AHDP Series - Part Numbering Sequence

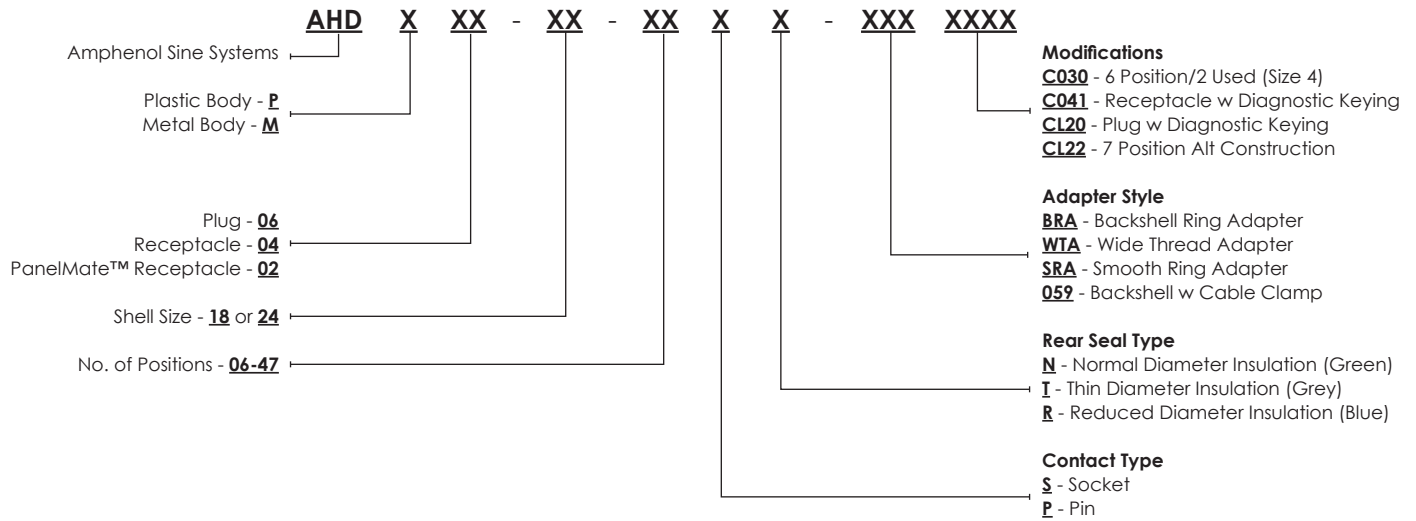

DuraMate™ AHDP/AHDM Series - Sample Layouts



AHD P06-18-20SN-SRA

Shell Size 18, 20 Pos, Plug, Socket, DuraMate™ AHDP Series, Plastic, Normal Seal, Smooth Ring Adapter



AHD P02-18-08PR-WTA

Shell Size 18, 8 Pos, Receptacle with Flange, Pin, DuraMate™ AHDP with PanelMate™, Plastic, Reduced Seal, Wide Thread Adapter



AHD P04-18-06PN-BRA

Shell Size 18, 6 Position, Receptacle, Pin, DuraMate™ AHDP, Plastic, Normal Seal, Backshell Ring Adapter (BRA) (Green)



AHDM 04-18-08SN

Shell Size 18, 8 Pos, Receptacle, Socket, DuraMate™ AHDM Series, Metal Body, Normal Seal, Wide Thread Adapter



AHDM 06-24-16PR

Shell Size 18, 16 Pos, Plug, Pin, DuraMate™ AHDM Series, Metal Body, Reduced Seal, Wide Thread Adapter



AHDM 06-18-14SR-059

Shell Size 18, 14 Pos, Plug, Socket, DuraMate™ AHDM Series, Metal Body, Reduced Seal, Backshell with Cable Clamp





DM DuraMate™ AHDP

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic, Circular Connectors

Available in Shell Size 18 with 8 insert arrangements 2, 6, 8, 14(x3), 20 and 21
Available in Shell Size 24 with 14 insert arrangements 7(x2), 9, 14, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

The DuraMate™ AHDP environmentally-sealed, multi-pin, heavy duty, plastic, circular connector series provides an economical quick-connect bayonet locking system manufactured to withstand the challenges and complexities of harsh environment off-road applications.

- 3 keyway bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- High current configurations incorporating revolutionary RADSOK® contacts
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges.
- Wire entry sealing available in four separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provide an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint
- Backshell Ring Adapters (BRA) allow for use with other compatible industry-standard snap-on backshells
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)



DuraMate™ AHDP - Specifications

Current Rating per Contact	Size 4 - 100A / Size 4+ - 100A Size 8 - 60A / Size 8 RADSOK - 80A Size 12 - 25A Size 16 - 13A Size 20 - 7.5A	Housing Material	Thermoplastic
Operating Temperature	-55°C to +125°C	Insulation Insert	Thermoplastic
Dielectric Withstanding Voltage	Current Leakage -2mA at 1500 VAC	Seal	Silicone Rubber
Degree of Protection	IP68/69K (in mated condition)	Contact	A Series™ Common System
Mating Cycle Durability	100 Cycles	Compliance	RoHS



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDP - Insert Arrangements (1) C030 - 6 Position/2 Used (Size 4); (2) C041 - Receptacle w Diagnostic Keying; (3) CL20 - Plug w Diagnostic Keying; (4) CL22 - 7 Position Alt Construction)

Shell Size 18							
18-06 (1) 2 x Size 4	18-06 2 x Size 4, 4 x Size 16	18-08 8 x Size 12	18-14 14 x Size 16	18-14 (2) 14 x Size 16	18-14 (3) 14 x Size 16	18-20 2 x Size 16, 18 x Size 20	18-21 21 x Size 20
N	N	N	R	N	R	N	R

Shell Size 24									
24-07 1 X Size 8 (RADSOCK®) 6 X Size 12	24-07 (4) 3 X Size 4, 4 X Size 16	24-09 1 X Size 4, 2 X Size 8 6 X Size 12	24-14 1 X Size 4, 1 X Size 12 12 X Size 16	24-16 16 X Size 12	24-18 1 X Size 8, 3 X Size 12 14 X Size 16	24-19 6 X Size 12, 13 X Size 16	24-21 4 X Size 12, 17 X Size 16	24-23 23 X Size 16	24-27 4 X Size 12, 23 X Size 16
N	N	R	N	R	N	R	N	R	R

Shell Size 24			
24-29 4 X Size 12, 19 X Size 16 6 X Size 20	24-31 31 X Size 16	24-35 3 X Size 16, 32 X Size 20	24-47 5 X Size 16, 42 X Size 20
R	R	T	R

Contact Legend (Size/Amperage)					
Size 4 or 4+ 100A	Size 8 60A	Size 8 RADSOCK® 80A	Size 12 25A	Size 16 13A	Size 20 7.5A

DuraMate™ AHDP - Recommended Wire Insulation Overall Diameter (OD) 4+ contact is only available for 24-07CL22

Contact Size	Typical Wire Range	(N) Normal Seal	(T) Thin Seal	(R) Reduced Seal (See datasheets)	
4+	4AWG (25.0-21.0mm ²)	7.9-10.67mm (0.311-0.420")	-	-	-
4	6AWG (16.0-13.0mm ²)	6.63-7.41mm (0.261-0.292")	-	6.63-7.41mm (0.261-0.292")	-
8	8-10AWG (10.0-5.0mm ²)	4.83-6.10mm (0.190-0.240")	-	3.43-5.59mm (0.135-0.220")	-
12	10-14AWG (6.0-2.0mm ²)	3.43-4.32mm (0.1350-.170")	-	2.46-4.01mm (0.135-0.158")	2.46-4.01mm (0.135-0.158")
16	14-20AWG (2.0-0.5mm ²)	2.54-3.40mm (0.100-0.134")	2.23-2.69mm (0.088-1.06")	1.35-3.05mm(0.053-0.120")	1.35-2.62mm (0.053-0.103")
20	16-22AWG (1.5-0.35mm ²)	1.02-2.41mm (0.040-.095")	-	1.02-02.41mm (0.040-0.095")	1.02-2.10mm (0.040-0.083")

DuraMate™ AHDP - Backshell Options and Accessory Overview



DuraMate™ AHDP - Plug & Receptacle Options (Dimensions in mm)

Shell Size 18 Plug	Shell Size 18 Receptacle	Shell Size 24 Plug	Shell Size 24 Receptacle
<p>Wide Thread Adapter (WTA)</p>	<p>Wide Thread Adapter (WTA)</p>	<p>Wide Thread Adapter (WTA)</p>	<p>Wide Thread Adapter (WTA)</p>
<p>Smooth Ring Adapter (SRA)</p>	<p>Smooth Ring Adapter (SRA)</p>	<p>Smooth Ring Adapter (SRA)</p>	<p>Smooth Ring Adapter (SRA)</p>
<p>Backshell Ring Adapter (BRA)</p>	<p>Backshell Ring Adapter (BRA)</p>	<p>Backshell Ring Adapter (BRA)</p>	<p>Backshell Ring Adapter (BRA)</p>













DuraMate™ AHDP w PanelMate™ - Receptacle Options (Dimensions in mm)

Shell Size 18 Plug	Shell Size 18 Receptacle	Shell Size 24 Plug	Shell Size 24 Receptacle
-	<p>PanelMate™ with Wide Thread Adapter (WTA)</p>	-	<p>PanelMate™ with Wide Thread Adapter (WTA)</p>
-	<p>PanelMate™ with Smooth Ring Adapter (SRA)</p>	-	<p>PanelMate™ with Smooth Ring Adapter (SRA)</p>
-	<p>PanelMate™ with Backshell Ring Adapter (BRA)</p>	-	<p>PanelMate™ with Backshell Ring Adapter (BRA)</p>

DuraMate™ AHDP - Backshell Options and Accessories

Image	Part Number	Description
	AHDPBS-015-1805	Shell Size 18, Backshell, Conduit, Snap Over, Right Angle 90°, Duramate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-18NUT Adapter
	AHDPBS-15L017-1805	Shell Size 18, Backshell, Conduit, Snap-Over, Right Angle 180°, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA)
	AHDPBS-011-2405	Shell Size 24, Backshell, Conduit, Snap Over, Right Angle 90°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter
	AHDPBS-11L017-2405	Shell Size 24, Backshell, Conduit, Snap-Over, Right Angle 180°, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA)
	AHDPBS-016-1805	Shell Size 18, Backshell, Conduit, Snap Over, Straight 180°, Duramate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-18NUT Adapter
	AHDPBS-16L017-1805	Shell Size 18, Backshell, Conduit, Snap-Over, Straight, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA)
	AHDPBS-010-2405	Shell Size 24, Backshell, Conduit, Snap Over, Straight 180°, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter
	AHDPBS-10L017-2405	Shell Size 24, Backshell, Conduit, Snap-Over, Straight, DuraMate™ AHDP Note: For use with Backshell Ring Adapter (BRA)
	AHDPBS-0406-001	Shell Size 24, Backshell, Tie Wrap, Wide Thread Adapter (WTA), DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-18-001	Shell Size 18, Backshell, Tie Wrap, Wide Thread Adapter (WTA), Cable Diameter Range 14.5mm - 18.0mm, Duramate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-0406-002	Shell Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut Cable Diameter Range 14.5mm - 18.0mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-0406-003	Shell Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut Cable Diameter Range 19.5mm - 24.1mm, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-18-002	Shell Size 18, Backshell, Wide Thread Adapter (WTA), 2PC, Compression Nut Cable Diameter Range 14.5mm-18.0mm, Duramate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-0406-SM01	Shell Size 24, Backshell, Sealed, Cable Grommet, DuraMate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDPBS-18-SM01	Shell Size 18, Backshell, Sealed, Cable Grommet, Duramate™ AHDP Note: For use with Wide Thread Adapter (WTA)
	AHDC06-24	Shell Size 24, Receptacle Cap, Sealed, DuraMate™ AHDP
	AHDC06-18	Shell Size 18, Receptacle Cap, Sealed, DuraMate™ AHDP
	AHDC04-24	Shell Size 24, Plug Cap, Sealed, DuraMate™ AHDP
	AHDC04-18	Shell Size 18, Plug Cap, Sealed, DuraMate™ AHDP

DuraMate™ AHDP - Backshell Options and Accessories, cont.

Image	Part Number	Description
	AHDC04-24-PM	Shell Size 24, Plug Cap, Sealed, Threaded, DuraMate™ AHDP
	AHDC04-24-PMT	Shell Size 24, Plug Cap, w Tether, Threaded, Lock Washer, Sealed, DuraMate™ AHDP
	AHDC04-24-T	Shell Size 24, Plug Cap, w Tether, Sealed, DuraMate™ AHDP
	AHDP24-PN01	Shell Size 24, Panel Nut, Duramate™ AHDP
	AHDP18-PN01	Shell Size 18, Panel Nut, DuraMate™ AHDP
	AT14-001-2486	Shell Size 24, Lock Washer, Wave, Duramate™ AHDP
	AT14-002-1886	Shell Size 18, Lock Washer, Wave, DuraMate™ AHDP
	AHDP-16-04477	Shell Size 24, Rubber Flange Seal, Duramate™ AHDP
	AHDP-16-04978	Shell Size 18, Rubber Flange Seal, DuraMate™ AHDP
	A114019	Contact Size 4, Blank Seal Plug
	A114018	Contact Size 8, Blank Seal Plug
	A114017	Contact Size 12/16, Blank Seal Plug
	AT13-217-1605	Contact Size 16, Locking Seal Plug
	AT13-204-2005	Contact Size 20, Blank Seal Plug
	AT11-027-0405	Contact Size 4+, Contact Removal Tool, 4AWG
	AT114009	Contact Size 4, Contact Removal Tool, 6AWG
	AT11-001-3.6M	Contact Size 8, Contact Removal Tool, 7-10AWG
	AT114008	Contact Size 8, Contact Removal Tool, 8-10AWG
	AT11-337-1205	Contact Size 12, Contact Removal Tool, 12-14AWG
	AT11-310-1605	Contact Size 16, Contact Removal Tool, 16-20AWG
	AT11-240-2005	Contact Size 20, Contact Removal Tool, 20-22AWG



DM DuraMate™ AHDP ISOBUS 91 Series

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Plastic Circular ISOBUS Connectors

Available in Shell Size 24, 9 Position



Amphenol Sine Systems' **DuraMate™ AHDP ISOBUS 91 Series** of environmentally-sealed, multi-pin, heavy duty, circular plastic (AHDP) plugs & receptacles provide an economical, quick-connect, circular bayonet locking system designed to meet ISO 11783 standards (for control and communications between tractors, implements and software) and withstand the challenges and complexities of harsh environment, off-road, agricultural applications.

Key ISOBUS 91 Series Features

- + One-to-one alternative for all HDP20 parts
- + Compatible to other industry standard circular bayonet versions
- + AHDP 91 Series Plugs have a jumper (bridged contacts) between Pin 4 & 5. (-P064 options have no jumper (bridged contacts) between Pin 4 & 5.)
- + AHDP 91 Series Receptacles do not have a jumper (bridged contact)
- + Options for up to 6AWG/16mm² power wires
- + Full range of backshell options

DuraMate™ Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High-strength, impact resistant & lightweight thermoplastic housings
- Low-insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP67/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high-temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in four separate ranges for discrete wire applications
- Wide Thread Adapters (WTA) provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Smooth Ring Adapters (SRA) are designed for use without backshells for a smaller footprint
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)



DuraMate™ AHDP ISOBUS 91 Series - Specifications

Current Rating per Contact	Size 8, 60A Size 12, 25A Size 16, 13A	Housing Material	Thermoplastic
Operating Temperature	-55°C to +125°C	Insulation Insert	Thermoplastic
Dielectric Withstanding Voltage	Current Leakage -2mA at 1500 VAC	Seal	Silicone Rubber
Degree of Protection	IP68/69K (in mated condition)	Contact	A Series™ Common System
Mating Cycle Durability	100 Cycles	Compliance	RoHS



A Series™ Family



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDP ISOBUS 91 Series - Insert Arrangements

Shell Size 24	Contact Legend (Size/Amperage)			
24-09 2 x Size 8, 2 x Size 12, 5 x Size 16				
	Size 8 (6AWG) 60A	Size 8 (8-10AWG) 60A	Size 12 25A	Size 16 13A
N	R			

DuraMate™ AHDP ISOBUS 91 Series - Recommended Wire Insulation Overall Diameter (OD)

Contact Size	Typical Wire Range	(N) Normal Seal	(R) Reduced Seal	(R) Reduced Seal for 6AWG/16mm² (Size 8 Contacts Only)
8	6-10AWG (5.0-16.0mm²)	4.83-6.10mm (0.190-0.240")	3.43-5.59mm (0.135-0.220")	6.50-7.42mm (0.256-0.292")
12	10-14AWG (6.0-2.0mm²)	3.40-4.32mm (0.134-0.170")	2.46-4.01mm (0.135-0.158")	2.46-4.01mm (0.135-0.158")
16	14-20AWG (2.0-0.5mm²)	2.54-3.40mm (0.100-0.134")	1.35-3.05mm (0.053-0.120")	1.35-3.05mm (0.053-0.120")z

DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessory Overview






DuraMate™ AHDP ISOBUS 91 Series - Plug & Receptacle Options (Dimensions in mm)

Shell Size 24 Plug	Shell Size 24 Receptacle	Shell Size 24 Plug	Shell Size 24 Receptacle
Wide Thread Adapter (WTA)	Wide Thread Adapter (WTA)	Smooth Ring Adapter (SRA)	Smooth Ring Adapter (SRA)




DuraMate™ AHDP ISOBUS 91 Series - Plugs

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDP06-24-91SN-SRA	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Smooth Ring Adapter (SRA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SN-WTA	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Wide Thread Adapter (WTA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SR-SRA	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SR-WTA	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SR16-SRA	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA), Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SR16-WTA	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA), Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SN-P064	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal, Smooth Ring Adapter (SRA) (Green) No Jumper (Bridged Contacts) Between Pin 4 & 5	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP06-24-91SR-P064	9 Position, Plug, Socket, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal, Smooth Ring Adapter (SRA) (Green) No Jumper (Bridged Contacts) Between Pin 4 & 5	Size 8, 60A Size 12, 25A Size 16, 13A	250V




DuraMate™ AHDP ISOBUS 91 Series - Receptacles

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDP04-24-91PN-SRA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Smooth Ring Adapter (SRA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP04-24-91PN-WTA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Normal Diameter Seal (Green), Wide Thread Adapter (WTA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP04-24-91PR-SRA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V














DuraMate™ AHDP ISOBUS 91 Series - Receptacles, cont.

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDP04-24-91PR-WTA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA)	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP04-24-91PR16-SRA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Smooth Ring Adapter (SRA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDP04-24-91PR16-WTA	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDP ISOBUS 91 Series, Plastic, Reduced Diameter Seal (Blue), Wide Thread Adapter (WTA), Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V

DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessories

Image	Part Number	Description
	AHDPBS-011-2405	Shell Size 24, Backshell, Conduit, Snap Over, Right Angle 90°, DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter
	AHDPBS-010-2405	Shell Size 24, Backshell, Conduit, Snap Over, Straight 180°, DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA). May also be used on DuraMate™ AHDM with P/N AHDM-BS-24NUT Adapter
	AHDPBS-0406-001	Shell Size 24, Backshell, Tie Wrap, Wide Thread Adapter (WTA), DuraMate™ AHDP ISOBUS 91 Series Note: For use with Wide Thread Adapter (WTA).
	AHDPBS-0406-002	Shell Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut, Cable Diameter Range 14.5mm - 18.0mm, DuraMate™ AHDP ISOBUS 91 Series
	AHDPBS-0406-003	Shell Size 24, Backshell, Wide Thread Adapter (WTA), 2 PC, Compression Nut, Cable Diameter Range 19.5mm - 24.1mm, DuraMate™ AHDP ISOBUS 91 Series
	AHDPBS-0406-SM01	Shell Size 24, Backshell, Sealed, Cable Grommet, DuraMate™ AHDP ISOBUS 91 Series
	AHDC06-24	Shell Size 24, Receptacle Cap, Sealed, DuraMate™ AHDP ISOBUS 91 Series
	AHDC04-24-PM	Shell Size 24, Plug Cap, Sealed, Threaded, DuraMate™ AHDP ISOBUS 91 Series

DuraMate™ AHDP ISOBUS 91 Series - Backshell Options and Accessories, cont.

Image	Part Number	Description
	AHDC04-24-PMT	Shell Size 24, Plug Cap, w Tether, Threaded, Lock Washer, Sealed, DuraMate™ AHDP ISOBUS 91 Series
	AHDP24-PN01	Shell Size 24, Panel Nut, DuraMate™ AHDP ISOBUS 91 Series
	AT14-001-2486	Shell Size 24, Lock Washer, Wave, DuraMate™ AHDP ISOBUS 91 Series
	AHDP-16-04477	Shell Size 24, Rubber Flange Seal, DuraMate™ AHDP ISOBUS 91 Series
	A114018	Contact Size 8, Blank Seal Plug
	A114017	Contact Size 12/16, Blank Seal Plug
	AT13-217-1605	Contact Size 16, Locking Seal Plug
	AT11-310-1605	Contact Size 16, Contact Removal Tool, Light Blue, 16-20AWG
	AT11-337-1205	Contact Size 12, Contact Removal Tool, Orange, 12-14AWG
	AT11-001-3.6M	Contact Size 8, Contact Removal Tool, Black, 7-10AWG
	AT114008	Contact Size 8, Contact Removal Tool, Green, 8-10AWG
	AT60-204-08141-16	Contact Size 8, 6AWG/16mm ² Wire Range, Contact, Pin, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts
	AT62-203-08141-16	Contact Size 8, 6AWG/16mm ² Wire Range, Contact, Socket, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts



DM Dura|Mate™ AHDM

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Metal, Circular Connectors

Available in Shell Size 18 with 6 insert arrangements 2, 6, 8, 14, 20 and 21
Available in Shell Size 24 with 14 insert arrangements 7(x2), 9, 14, 16, 18, 19, 21, 23, 27, 29, 31, 35 and 47

The **DuraMate™ AHDM** environmentally-sealed, multi-pin, heavy duty, metal, circular connector series provides an economical quick-connect bayonet locking system manufactured to withstand the challenges and complexities of harsh environment off-road applications.

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High current configurations incorporating revolutionary RADSOK® contacts
- High strength impact resistant & lightweight zinc-alloy metal housings
- Low insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP68/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant.
- Sealing features consisting of durable high temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges.
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)
- Wire entry sealing available in three separate ranges for discrete wire applications
- Integrated Wide Threading provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells



DuraMate™ AHDM - Specifications

Current Rating per Contact	Size 4 - 100A / Size 4+ - 100A Size 8 - 60A / Size 8 RADSOK - 80A Size 12 - 25A Size 16 - 13A Size 20 - 7.5A	Housing Material	Zinc-Alloy
Operating Temperature	-55°C to +125°C	Insulation Insert	Thermoplastic
Dielectric Withstanding Voltage	Current Leakage -2mA at 1500 VAC	Seal	Silicone Rubber
Degree of Protection	IP68/69K (in mated condition)	Contact	A Series™ Common System
Mating Cycle Durability	100 Cycles	Compliance	RoHS



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDM - Insert Arrangements (1) C030 - 6 Position/2 Used (Size 4); (4) CL22 - 7 Position Alt Construction)

Shell Size 18					
18-06 (1) 2 x Size 4	18-06 2 x Size 4, 4 x Size 16	18-08 8 x Size 12	18-14 14 x Size 16	18-20 2 x Size 16, 18 x Size 20	18-21 21 x Size 20
N	N	N	R	N	R

Contact Legend (Size/Amperage)					
Size 4 or 4+ 100A	Size 8 60A	Size 8 RADSOK® 80A	Size 12 25A	Size 16 13A	Size 20 7.5A

Shell Size 24									
24-07 1 X Size 8 (RADSOK®) 6 X Size 12	24-07 (4) 3 X Size 4, 4 X Size 16	24-09 1 X Size 4, 2 X Size 8 6 X Size 12	24-14 1 X Size 4, 1 X Size 12 12 X Size 16	24-16 16 X Size 12	24-18 1 X Size 8, 3 X Size 12 14 X Size 16	24-19 6 X Size 12, 13 X Size 16	24-21 4 X Size 12, 17 X Size 16	24-23 23 X Size 16	24-27 4 X Size 12, 23 X Size 16
N	N	R	N	R	N	R	N	R	R

Shell Size 24			
24-29 4 X Size 12, 19 X Size 16 6 X Size 20	24-31 31 X Size 16	24-35 3 X Size 16, 32 X Size 20	24-47 5 X Size 16, 42 X Size 20
R	R	T	R


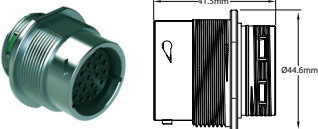
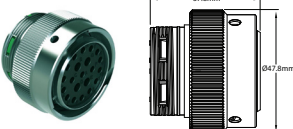
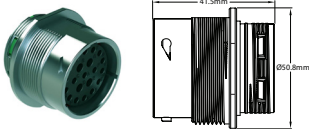
DuraMate™ AHDM - Recommended Wire Insulation Overall Diameter (OD) 4+ contact is only available for 24-07CL22

Contact Size	Typical Wire Range	(N) Normal Seal	(T) Thin Seal	(R) Reduced Seal (See datasheets)	
4+	4AWG (25.0-21.0mm ²)	7.9-10.67mm (0.311-0.420")	-	-	-
4	6AWG (16.0-13.0mm ²)	6.63-7.41mm (0.261-0.292")	-	6.63-7.41mm (0.261-0.292")	-
8	8-10AWG (10.0-5.0mm ²)	4.83-6.10mm (0.190-0.240")	-	3.43-5.59mm (0.135-0.220")	-
12	10-14AWG (6.0-2.0mm ²)	3.43-4.32mm (0.1350-.170")	-	2.46-4.01mm (0.135-0.158")	2.46-4.01mm (0.135-0.158")
16	14-20AWG (2.0-0.5mm ²)	2.54-3.40mm (0.100-0.134")	2.23-2.69mm (0.088-1.06")	1.35-3.05mm(0.053-0.120")	1.35-2.62mm (0.053-0.103")
20	16-22AWG (1.5-0.35mm ²)	1.02-2.41mm (0.040-.095")	-	1.02-02.41mm (0.040-0.095")	1.02-2.10mm (0.040-0.083")









DuraMate™ AHDM - Backshell Options and Accessory Overview









DuraMate™ AHDM - Plug & Receptacle Options (Dimensions in mm)

Shell Size 18 Standard Plug	Shell Size 18 Standard Receptacle	Shell Size 24 Standard Plug	Shell Size 24 Standard Receptacle
Integrated Wide Threading	Integrated Wide Threading	Integrated Wide Threading	Integrated Wide Threading
			

DuraMate™ AHDM - Backshell Options and Accessories

Image	Part Number	Description
	AHDMBS-24-002	Shell Size 24, Backshell, 2 PC, DuraMate™ AHDM
	AHDMBS-18-002	Shell Size 18, Backshell, 2 PC, DuraMate™ AHDM
	AHDMBS-24-001	Shell Size 24, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM
	AHDMBS-18-001	Shell Size 18, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM
	AHDMBS-24-059	Shell Size 24, Backshell, w Cable Clamp, DuraMate™ AHDM
	AHDMBS-18-059	Shell Size 18, Backshell, w Cable Clamp, DuraMate™ AHDM
	AHDMBS-24-SM01	Shell Size 24, Backshell, Metal, DuraMate™ AHDM
	AHDMBS-18-SM01	Size 18, Backshell, Metal, DuraMate™ AHDM
	AHDM-BS-24NUT	Shell Size 24, Adapter for use with: AHPBS-010-2405 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHPBS-011-2405 AHDP Backshell, Conduit, Snap-Over, Right Angle 90
	AHDM-BS-18NUT	Shell Size 18, Adapter for use with: AHPBS-015-1805 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHPBS-016-1805 AHDP Backshell, Conduit, Snap-Over, Right Angle 90
	AHDC34-24	Shell Size 24, Protective Cap for Plug, DuraMate™ AHDM
	AHDC34-18	Shell Size 18, Protective Cap for Plug, DuraMate™ AHDM
	AHDC36-24	Shell Size 24, Protective Cap for Receptacle, DuraMate™ AHDM
	AHDC36-18	Shell Size 18, Protective Cap for Receptacle, DuraMate™ AHDM
	A112264	Shell Size 24, Lockwasher, DuraMate™ AHDM
	A114021	Shell Size 18, Lockwasher, DuraMate™ AHDM

DuraMate™ AHDM - Backshell Options and Accessories, cont.

Image	Part Number	Description
	A112263-90	Shell Size 24, Nut, DuraMate™ AHDM
	A114020-90	Shell Size 18, Nut, DuraMate™ AHDM
	A114019	Contact Size 4, Blank Seal Plug
	A114018	Contact Size 8, Blank Seal Plug
	A114017	Contact Size 12/16, Blank Seal Plug
	AT13-217-1605	Contact Size 16, Locking Seal Plug
	AT13-204-2005	Contact Size 20, Blank Seal Plug
	AT11-027-0405	Contact Size 4+, Contact Removal Tool, 4AWG
	AT114009	Contact Size 4, Contact Removal Tool, 6AWG
	AT11-001-3.6M	Contact Size 8, Contact Removal Tool, 7-10AWG
	AT114008	Contact Size 8, Contact Removal Tool, 8-10AWG
	AT11-337-1205	Contact Size 12, Contact Removal Tool, 12-14AWG
	AT11-310-1605	Contact Size 16, Contact Removal Tool, 16-20AWG
	AT11-240-2005	Contact Size 20, Contact Removal Tool, 20-22AWG



DM DuraMate™ AHDM/AHDBM ISOBUS 91 Series

Environmentally-Sealed, Multi-Pin, Heavy-Duty, Metal Circular ISOBUS Connectors

Available in Shell Size 24, 9 Position

Amphenol Sine Systems' DuraMate™ AHDM/AHDBM ISOBUS 91 Series of environmentally-sealed, multi-pin, heavy-duty, circular metal plugs (AHDM) and breakaway metal (AHDBM) plugs & receptacles provide an economical, quick-connect, bayonet locking system **designed to meet ISO 11783 standards (for control and communications between tractors, implements and software) and withstand the challenges and complexities of harsh environment, off-road, agricultural applications.**

Key ISOBUS 91 Series Features

- + One-to-one alternative for all HD30/HDB36 parts
- + Compatible to other industry standard (Circular Bayonet) versions while retaining full breakaway functionality
- + AHDM 91 Series Plugs have a jumper (bridged contacts) between Pin 4 & 5
- + AHDM/AHDBM 91 Series Receptacles don't have a jumper (bridged contact)
- + Options for up to 16mm² power wires
- + Full range of backshell options

Important

- AHDBM 91 Series Plugs are intermateable to other industry standard versions and allow full breakaway functionality if used with suitable breakaway-ready Receptacles (like AHDBM 91 Receptacles)
- AHDM 91 Series Plugs are intermateable to other industry standard versions but do not retain breakaway functionality
- AHDBM 91 Series Receptacles (Circular Bayonet) are intermateable to other industry standard plugs and allow breakaway functionality when used with a breakaway Plugs (like AHDBM 91 Plugs)
- Available upon request and not shown on this flyer: AHDM 91 Series Receptacles (Drop Shaped Bayonet) are not intermateable to all industry standard versions and do not retain breakaway functionality

DuraMate™ Features

- 3 key-way bayonet design ensures proper mating of connectors
- High density signal and mixed power insert configurations
- Operating temperature range: -55°C to +125°C
- High-strength, impact resistant & lightweight zinc-alloy metal housings
- Low-insertion force stamped terminals offer improved manufacturing efficiencies
- Environmentally-sealed and engineered rapid and secure mating system achieves IP67/IP69K protection (in mated condition) from ingress of dust, water, mud and other contaminants and is vibration resistant
- Sealing features consisting of durable high-temperature silicone provide barrier from lubricating oils, hydraulic fluids and fossil fuels
- Backshells maintain a compression-fit design to resist maximum pull-out forces and facilitate strain-relief for jacketed cable ranges
- Wire entry sealing available in four separate ranges for discrete wire applications
- Integrated Wide Threading provides an enhanced threading for use with our wide variety of screw-on or clamshell backshells
- Utilizes A Series™ standard contact system (Stamped & Formed or Machined)

AHDBM Circular Bayonet Breakaway-Ready Receptacle



AHDM Circular Bayonet Standard Plug

AHDBM Circular Bayonet Breakaway Plug



A Series™ Family



Standard products. Custom solutions
Customer Service +1 800 394 7732

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Specifications

Current Rating per Contact	Size 8, 60A; Size 12, 25A; Size 16, 13A	Housing Material	Zinc-alloy/Aluminum-alloy
Operating Temperature	-55°C to +125°C	Insulation Insert	Thermoplastic
Dielectric Withstanding Voltage	Current Leakage-2mA at 1500 VAC	Seal	Silicone Rubber
Degree of Protection	IP68/69K (in mated condition)	Contact	A Series™ Common System
Mating Cycle Durability	100 Cycles	Compliance	RoHS

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Insert Arrangements

<p>Size 24</p> <p>24-09 2 x Size 8, 2 x Size 12, 5 x Size 16</p>	<p>Contact Legend (Size/Amperage)</p> <table border="1"> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Size 8 (6AWG) 60A</td> <td>Size 8 (8-10AWG) 60A</td> <td>Size 12 25A</td> <td>Size 16 13A</td> </tr> </table>					Size 8 (6AWG) 60A	Size 8 (8-10AWG) 60A	Size 12 25A	Size 16 13A
Size 8 (6AWG) 60A	Size 8 (8-10AWG) 60A	Size 12 25A	Size 16 13A						
<p>N</p> <p>R</p>									

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Recommended Wire Insulation Overall Diameter (OD)

Contact Size	Typical Wire Range	(N) Normal Seal	(R) Reduced Seal	(R) Reduced Seal for 6AWG/16mm² (Size 8 Contacts Only)
8	6-10AWG (5.0-16.0mm²)	4.83-6.10mm (0.190-0.240")	3.43-5.59mm (0.135-0.220")	6.50-7.42mm (0.256-0.292")
12	10-14AWG (6.0-2.0mm²)	3.40-4.32mm (0.134-0.170")	2.46-4.01mm (0.135-0.158")	2.46-4.01mm (0.135-0.158")
16	14-20AWG (2.0-0.5mm²)	2.54-3.40mm (0.100-0.134")	1.35-3.05mm (0.053-0.120")	1.35-3.05mm (0.053-0.120")

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessory Overview






DuraMate™ AHDM ISOBUS 91 Series - Plug & Receptacle Options (Dimensions in mm)

Shell Size 24 Plug	Shell Size 24 Breakaway Plug	Shell Size 24 Breakaway Receptacle
Integrated Wide Threading	Integrated Wide Threading	Integrated Wide Threading




DuraMate™ AHDM ISOBUS 91 Series - Plugs

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDM06-24-91SN	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDM06-24-91SN-059	9 Pos, Kit, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDM06-24-91SR	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDM06-24-91SR-059	9 Pos, Kit, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDM06-24-91SR16	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDM06-24-91SR16-059	9 Pos, Kit, Plug, Socket, Shell Size 24, DuraMate™ AHDM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Size 8 Contact, 6AWG/16mm ² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm ² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V

DuraMate™ AHDBM ISOBUS 91 Series - Breakaway Plugs

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDBM06-24-91SN	9 Pos, Plug, Socket, Shell Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Breakway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM06-24-91SN-059	9 Pos, Kit, Plug, Socket, Shell Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell, Breakway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM06-24-91SR	9 Pos, Plug, Socket, Shell Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V













DuraMate™ AHDBM ISOBUS 91 Series - Breakaway Plugs, cont.

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDBM06-24-91SR-059	9 Pos, Kit, Plug, Socket, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM06-24-91SR16	9 Pos, Kit, Plug, Socket, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM06-24-91SR16-059	9 Pos, Plug, Socket, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT62-203-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V






DuraMate™ AHDBM ISOBUS 91 Series - Breakaway-Ready Receptacles

Image	Part Number	Description	Contact Size/Amp	Voltage
	AHDBM04-24-91PN	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Breakaway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM04-24-91PN-059	9 Pos, Kit, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Normal Diameter Seal (Green), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM04-24-91PR	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM04-24-91PR-059	9 Pos, Kit, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM04-24-91PR16	9 Pos, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Breakaway-Ready, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V
	AHDBM04-24-91PR16-059	9 Pos, Kit, Receptacle, Pin, Shell Size 24, DuraMate™ AHDBM ISOBUS 91 Series, Metal, Reduced Diameter Seal (Blue), Integrated Wide Threading, Cable Clamp Backshell, Breakaway-Ready, Size 8 Contact, 6AWG/16mm² Wire Seal Note: Use AT60-204-08141-16 contacts for 6AWG/16mm² applications	Size 8, 60A Size 12, 25A Size 16, 13A	250V

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessories

Image	Part Number	Description
	AHDMBS-24-002	Shell Size 24, Backshell, 2 PC, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	AHDMBS-24-001	Shell Size 24, Backshell, Tie Wrap, End Bell, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	AHDMBS-24-059	Shell Size 24, Backshell, w Cable Clamp, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	AHDMBS-24-SM01	Shell Size 24, Backshell, Metal, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	AHDM-BS-24NUT	Shell Size 24, Adapter for use with: AHDPBS-010-2405 AHDP Backshell, Conduit, Snap-Over, Straight 180 AHDPBS-011-2405 AHDP Backshell, Conduit, Snap-Over, Right Angle 90
	AHDC34-24	Shell Size 24, Protective Cap for Plug, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	AHDC36-24	Shell Size 24, Protective Cap for Receptacle, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	A112264	Shell Size 24, Lockwasher, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	A112263-90	Shell Size 24, Nut, DuraMate™ AHDM/AHDBM ISOBUS 91 Series
	A114018	Contact Size 8, Blank Seal Plug
	A114017	Contact Size 12/16, Blank Seal Plug
	AT13-217-1605	Contact Size 16, Locking Seal Plug
	AT11-310-1605	Contact Size 16, Contact Removal Tool, Light Blue, 16-20AWG

DuraMate™ AHDM/AHDBM ISOBUS 91 Series - Backshell Options and Accessories, cont.

Image	Part Number	Description
	AT11-337-1205	Contact Size 12 , Contact Removal Tool, Orange, 12-14AWG
	AT11-001-3.6M	Contact Size 8, Contact Removal Tool, Black, 7-10AWG
	AT114008	Contact Size 8, Contact Removal Tool, Green, 8-10AWG
	AT60-204-08141-16	Contact Size 8, 6AWG/16mm ² Wire Range, Contact, Pin, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts
	AT62-203-08141-16	Contact Size 8, 6AWG/16mm ² Wire Range, Contact, Socket, Nickel-plated Note: Refer to Plug/Receptacle datasheets for a complete list of available contacts

For more information, contact: Customer Service, +1 800 394 7732, csr@amphenol-sine.com

© 2018 Amphenol Sine Systems Corporation, 44274 Morley Drive, Clinton Township MI 48036 USA. www.amphenol-sine.com. Customer Service +1 800 394 7732
Every effort has been made to ensure that the information contained in this document is accurate at the time of publication. Specifications or information stated in this document are subject to change without notice.