

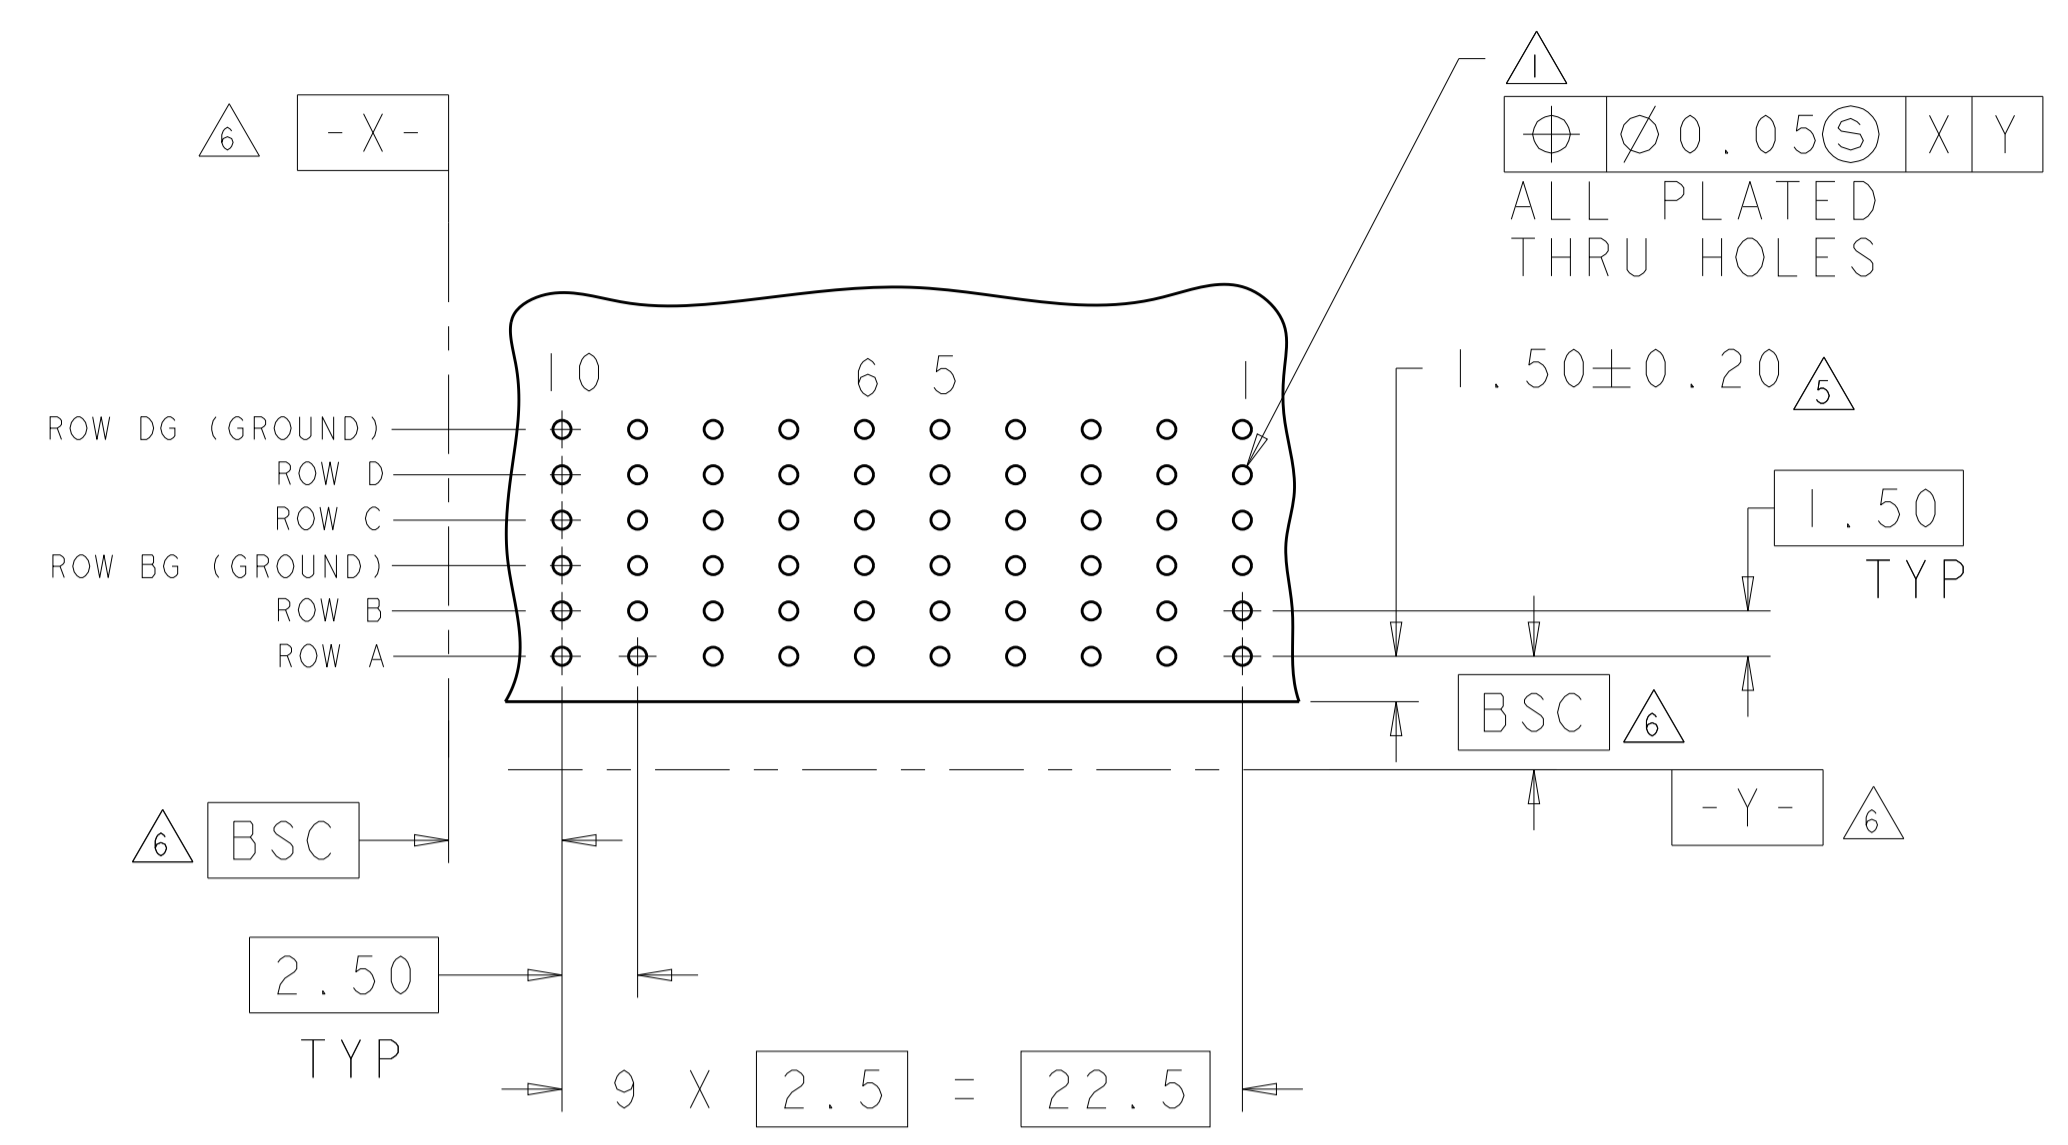
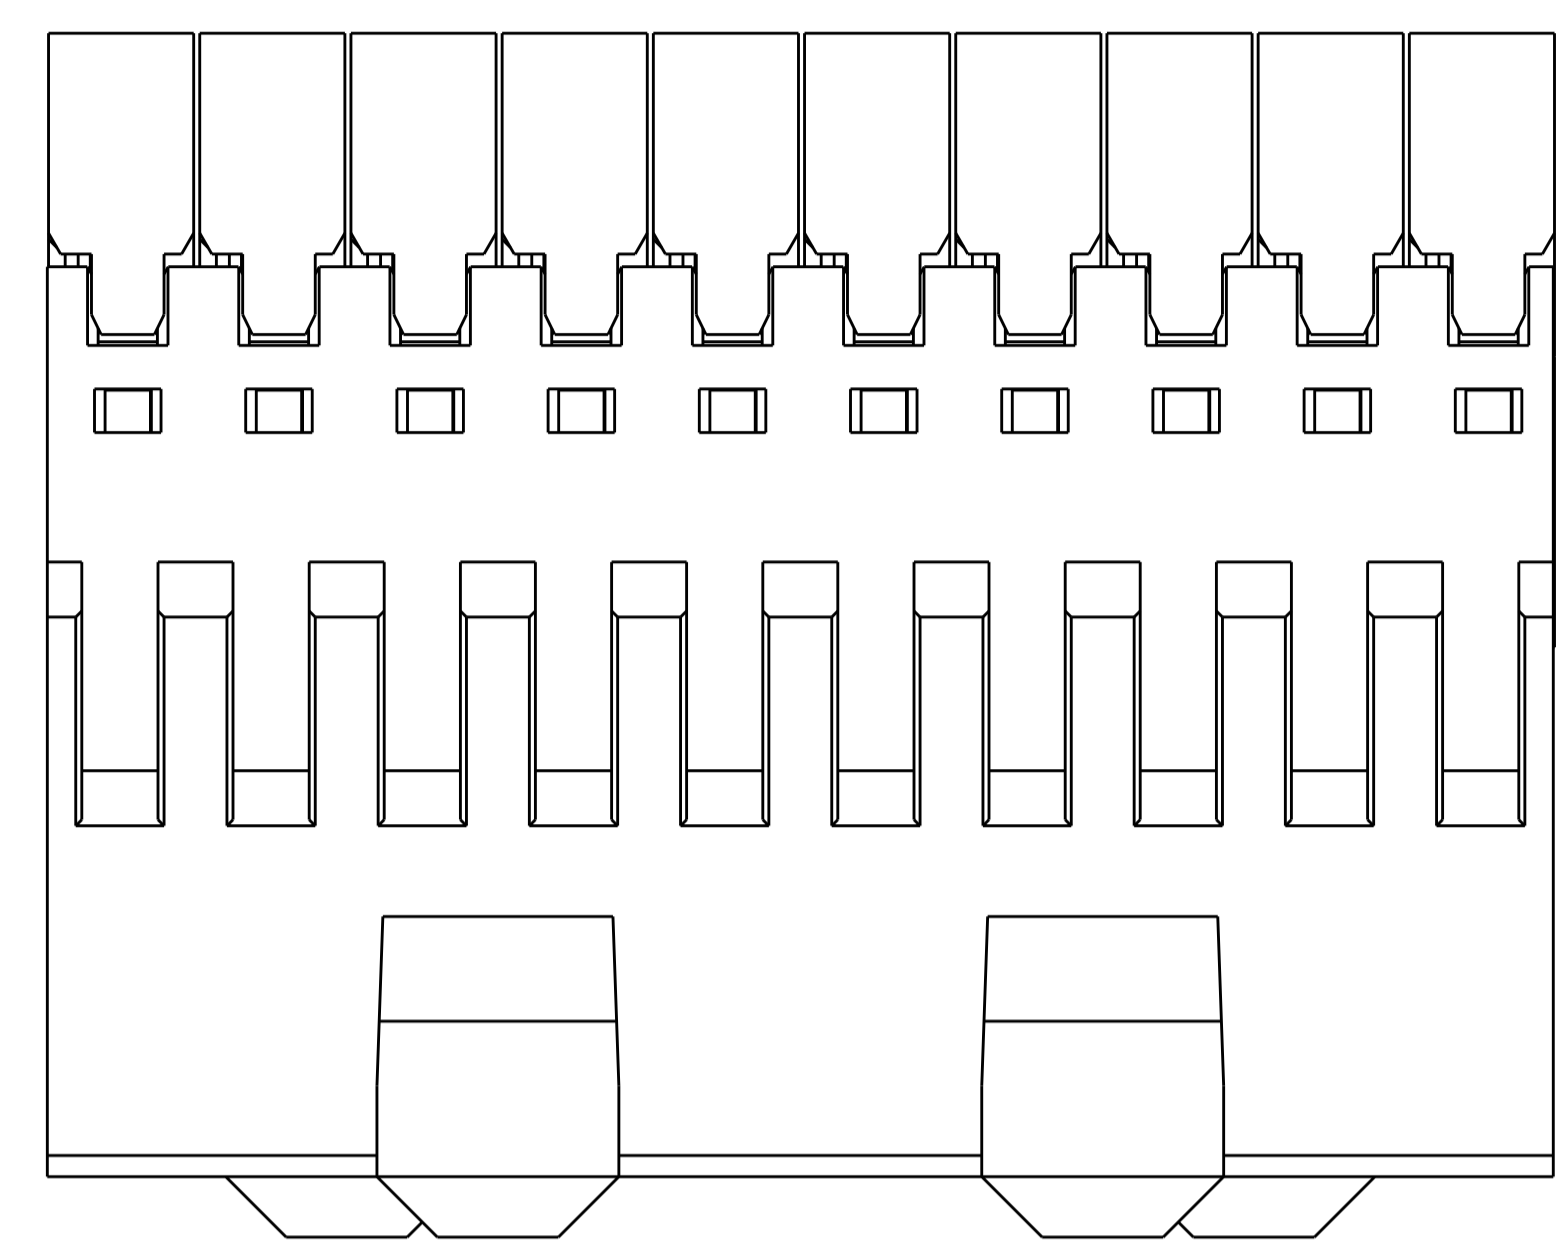
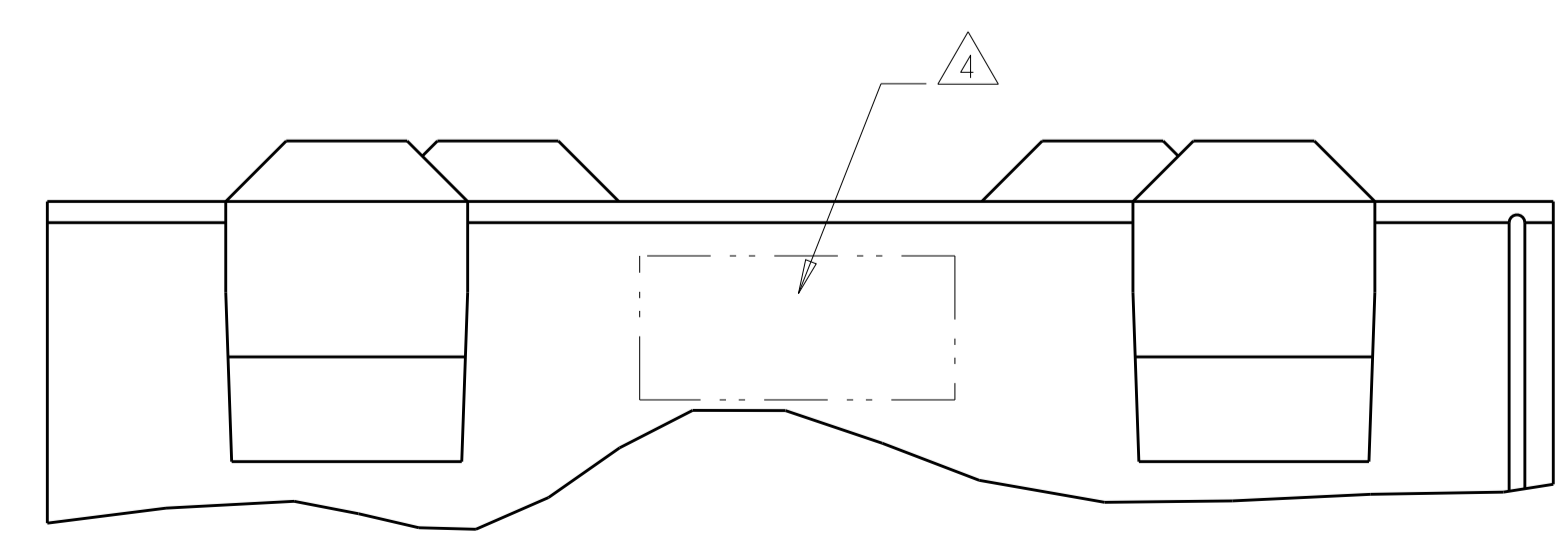


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
D		REVISED PER ECO-14-005095	16APR2014	AP RP
E		REVISED PER ECO-16-008845	26SEP2016	AP RP

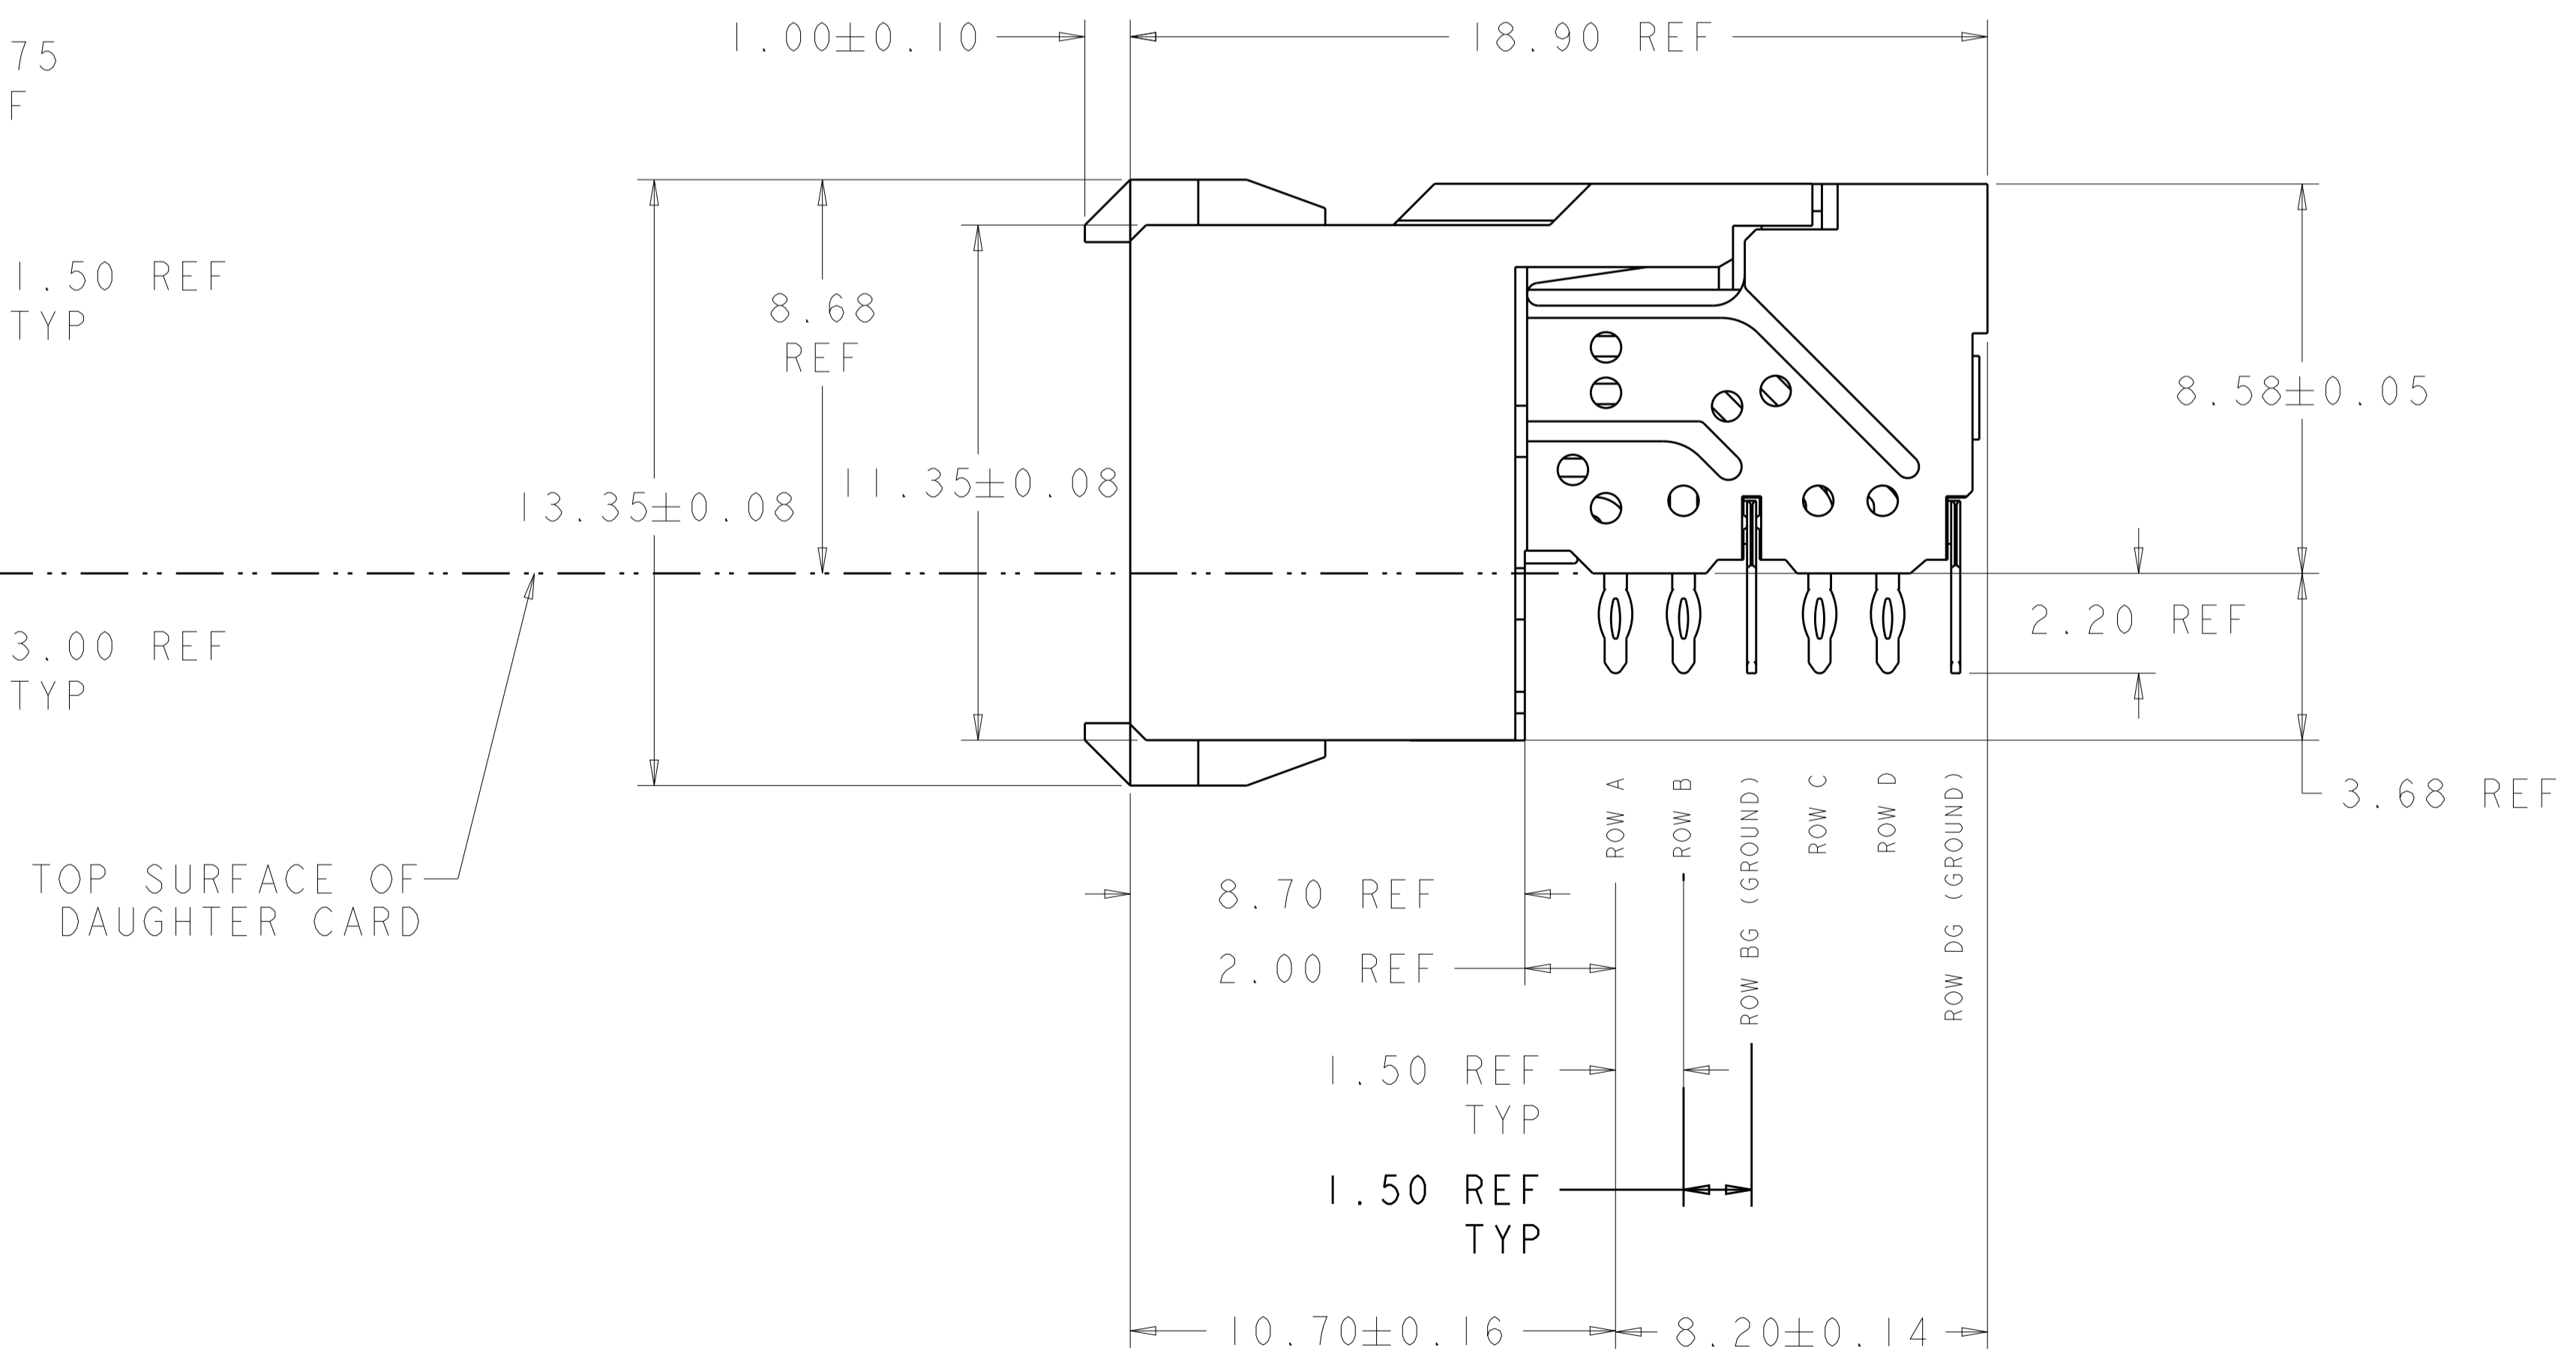

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:  
SHIELD - PHOSPHOR BRONZE  
CONTACT - COPPER-NICKEL-SILICON  
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
- △ FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE. APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

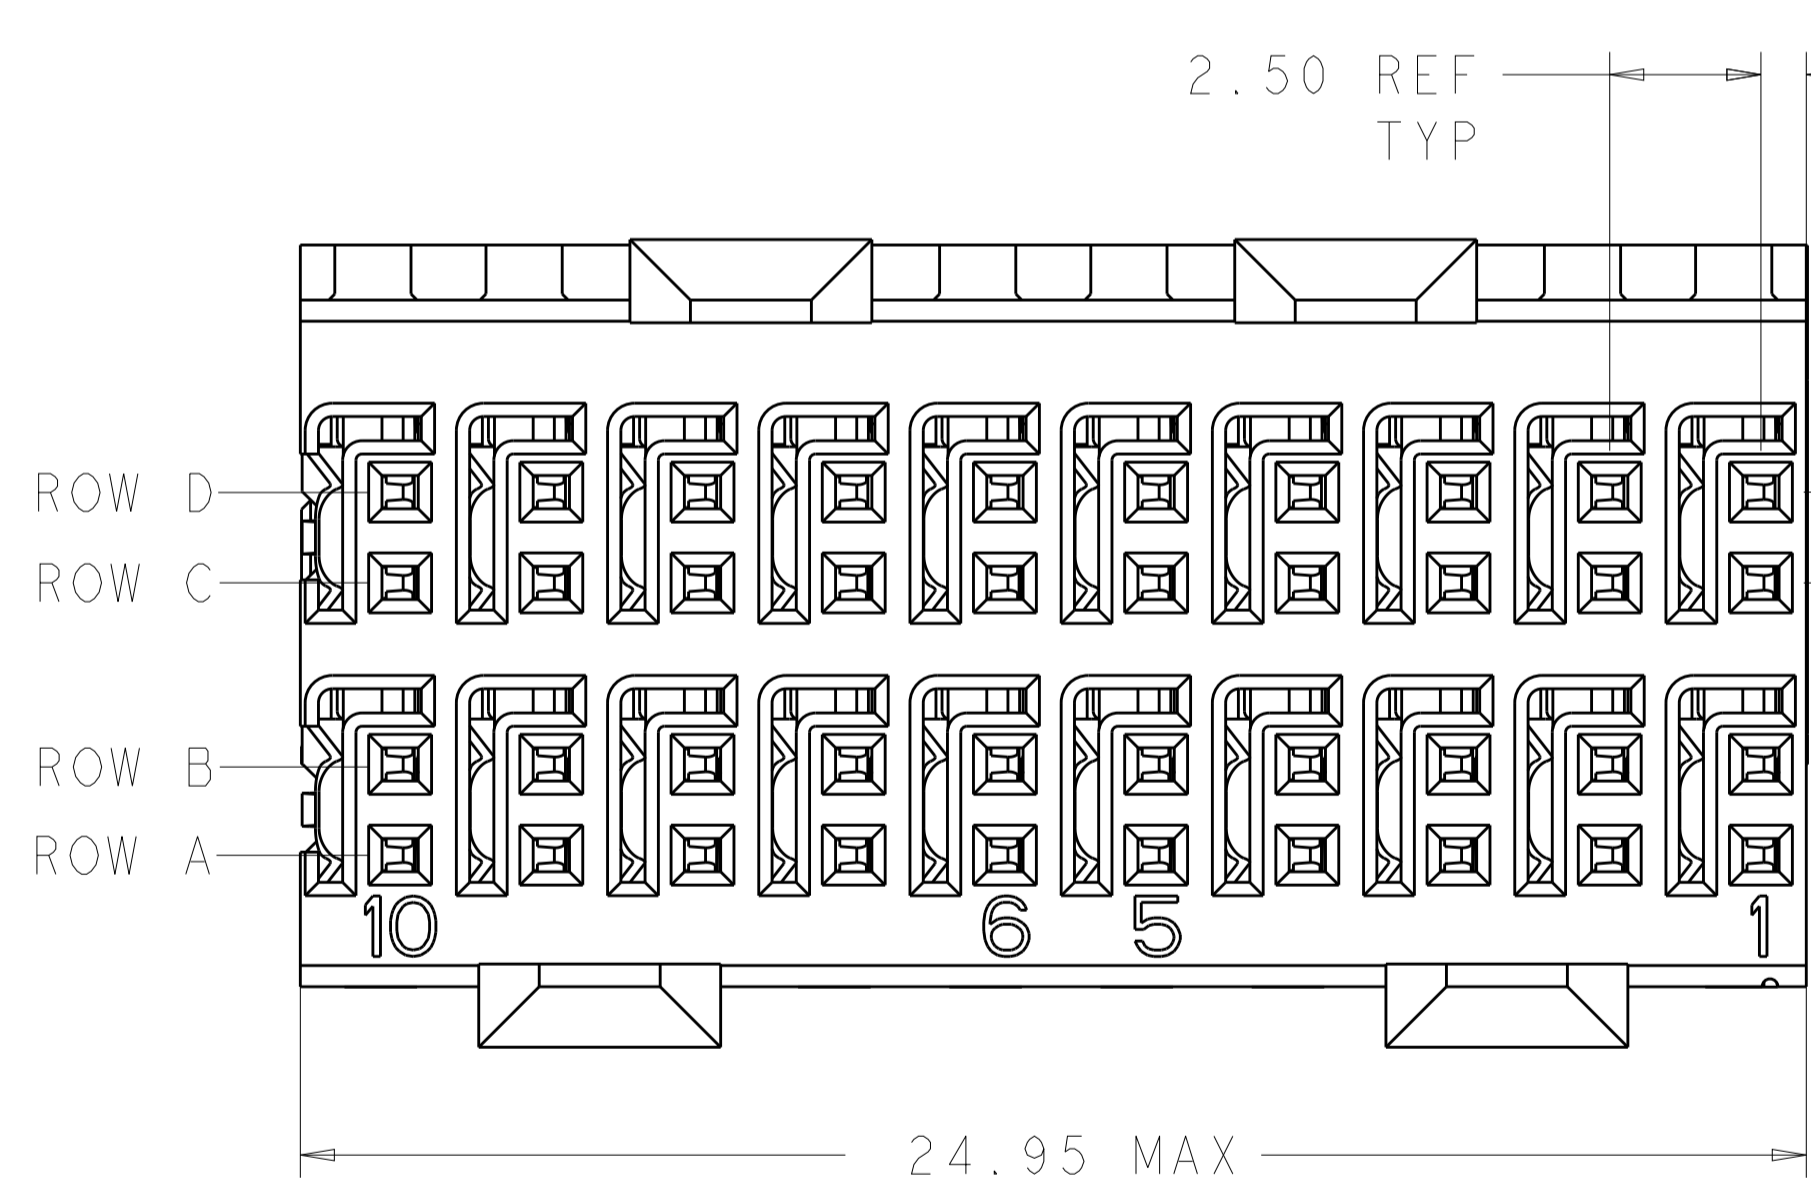

6469028-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN S. J. MAGARO 17JUN2004	TE Connectivity	
DIMENSIONS:		CHK R. A. PATTERSON 17JUN2004	NAME RECEPTACLE ASSEMBLY, 2 PAIR, 25mm, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON 16MAY2007	PRODUCT SPEC	
mm		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
0 PLC	±	WEIGHT	A100779C=6469028	
1 PLC	±	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV E	
2 PLC	±			
3 PLC	±			
4 PLC	±			
ANGLES	±			
MATERIAL	FINISH			